



Electric instantaneous  
water heater

## EPME electronic LCD

Electronic controlled  
heater with LCD display

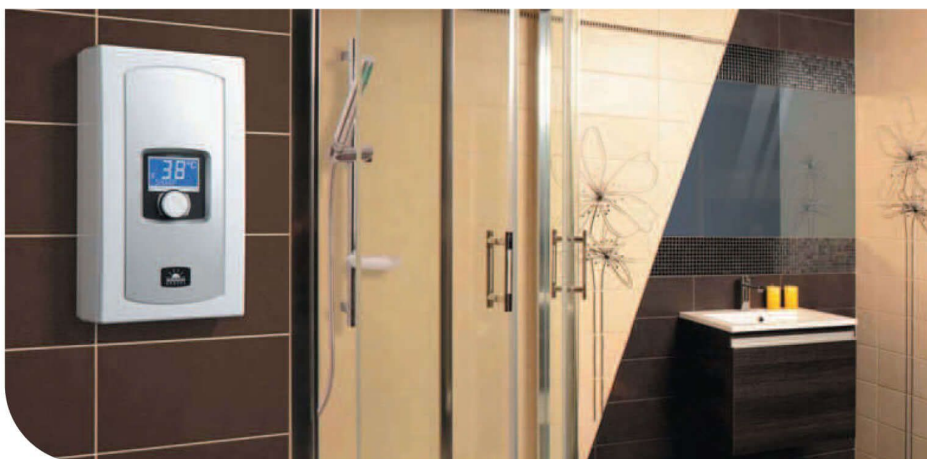

### Most important advantages

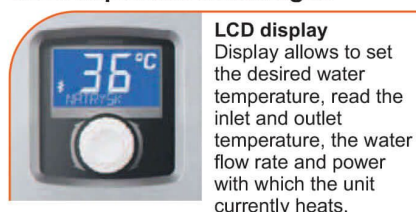

**LCD display**  
Display allows to set the desired water temperature, read the inlet and outlet temperature, the water flow rate and power with which the unit currently heats.



**Electronic control**  
system ensures stability and smooth regulation of water temperature from 30°C to 60°C (1°C step).




**Copper shielded heating elements**  
Reliable technology ensures long life, resistance to water decay and air bubbles.



**Suitable for cooperation with solar collectors and heat pumps**  
Can work on already pre-heated water. Inletting water temperature up to 70°C.



**Temperature lock**  
This allows the user to save the maximum temperature value e.g. in order to protect children against burn injuries.





**7 powers in 1 heater**

### Dimensions



Supply water pressure 0,1 - 0,6 MPa  
Inlet and outlet section 1/2" outer thread

### Application



A fine-stream shower head recommended

### Technical data

Type	Rated power	Rated voltage	Rated current (A)	Min. connecting wires section (mm <sup>2</sup> )	Efficiency (Δt=30°) (l/min.)
EPME-5,5 - 8,5	5,5 kW	230V	24,0	3 x 2,5	2,7
	6,0 kW	230V	26,1	3 x 4	2,9
	6,5 kW	230V	28,5	3 x 4	3,1
	7,0 kW	230V	30,6	3 x 4	3,4
	7,5 kW	230V	32,7	3 x 6	3,6
	8,0 kW	230V	34,8	3 x 6	3,8
	8,5 kW	230V	37,0	3 x 6	4,1

All technical data is based on standards of Central European countries.